



COMPOSITION

90% lana naturale, 10% poliestere
Tessile ecologico in feltri naturali di lana.



RECYCLABLE

100% Prodotto riciclabile nel rispetto dell'ambiente.



MADE IN ITALY



FIRE RESISTANCE

TESSUTO | UE: B-s2, d0 - UNI EN 13823:2010+A1:2014
*Opzionale | USA: Class A - ASTM E 84-18



EASY CLEANING

Usare con regolarità l'aspirapolvere a beccuccio liscio, oppure utilizzare spazzole a setole morbide o detergenti professionali per imbottiti.



DURABILITY

Martindale Pilling: UNI EN ISO 12945-2:2002
5.000 cicli: 1,5 mm - grado 2 / 4,5 mm - grado 3
Martindale Abrasion: UNI EN ISO 12947-1:2000
14.000 cicli: 1,5 mm - grado 3 -4 / 100.000 cicli:
4,5 mm - grado 4.



COLOUR MATCHING

Leggere differenze di colore tra una partita e l'altra sono da considerarsi normali e garanzia di riciclo.



POINT OUT!

Il feltro è caratterizzato dalla presenza di piccoli punti, legati al processo di cardatura del feltro tinto in fibra. Le impurità sono più evidenti su feltri chiari e a tinta unita.



WIDTH

cm 150 ± 5% | " 59 ± 5%
Senza adesivo sul retro

cm 145 usable ± 2% | " 57 ± 2%
Adesivo sul retro



THICKNESS | WEIGHT

mm 1,5 | gr/mtl 420
mm 3 | gr/mtl 820
mm 4,5 | gr/mtl 1200
mm 6 | gr/mtl 1630
mm 8 | gr/mtl 2000



ENVIRONMENTAL IMPACT

90% natural wool, 10% polyester
Ecological textile of natural wool felts.


100% Recyclable product respecting the environment.



INDOOR QUALITY

FABRIC | UE: B-s2, d0 - UNI EN 13823:2010+A1:2014
*Optional | USA: Class A - ASTM E 84-18

Use regularly the vacuum-cleaner with smooth spout, or brushes with soft bristles, or upholstered professional cleaners.



DESIGN COMMITMENT

Martindale Pilling: UNI EN ISO 12945-2:2002
5.000 turns: 1,5 mm - grado 2 / 4,5 mm - grado 3
Martindale Abrasion: UNI EN ISO 12947-1:2000
14.000 cycles: 1,5 mm - grado 3 -4 / 100.000 cicli:
4,5 mm - grado 4.

Slightly differences between dyeing lots are considered normal and recycling guarantee.


Felt is characterized by the presence of small dots, linked to the carding process of the fiber-dyed felt. Impurities are most noticeable on light-colored and solid colored felts.

cm 150 ± 5% | " 59 ± 5%
Not-Adhesive back

cm 145 usable ± 2% | " 57 ± 2%
Adhesive back

BLQCKO

www.blocko.design - www.facebook.com/blockodesign
www.instagram.com/blocko.design - www.linkedin.com/company/75448075/

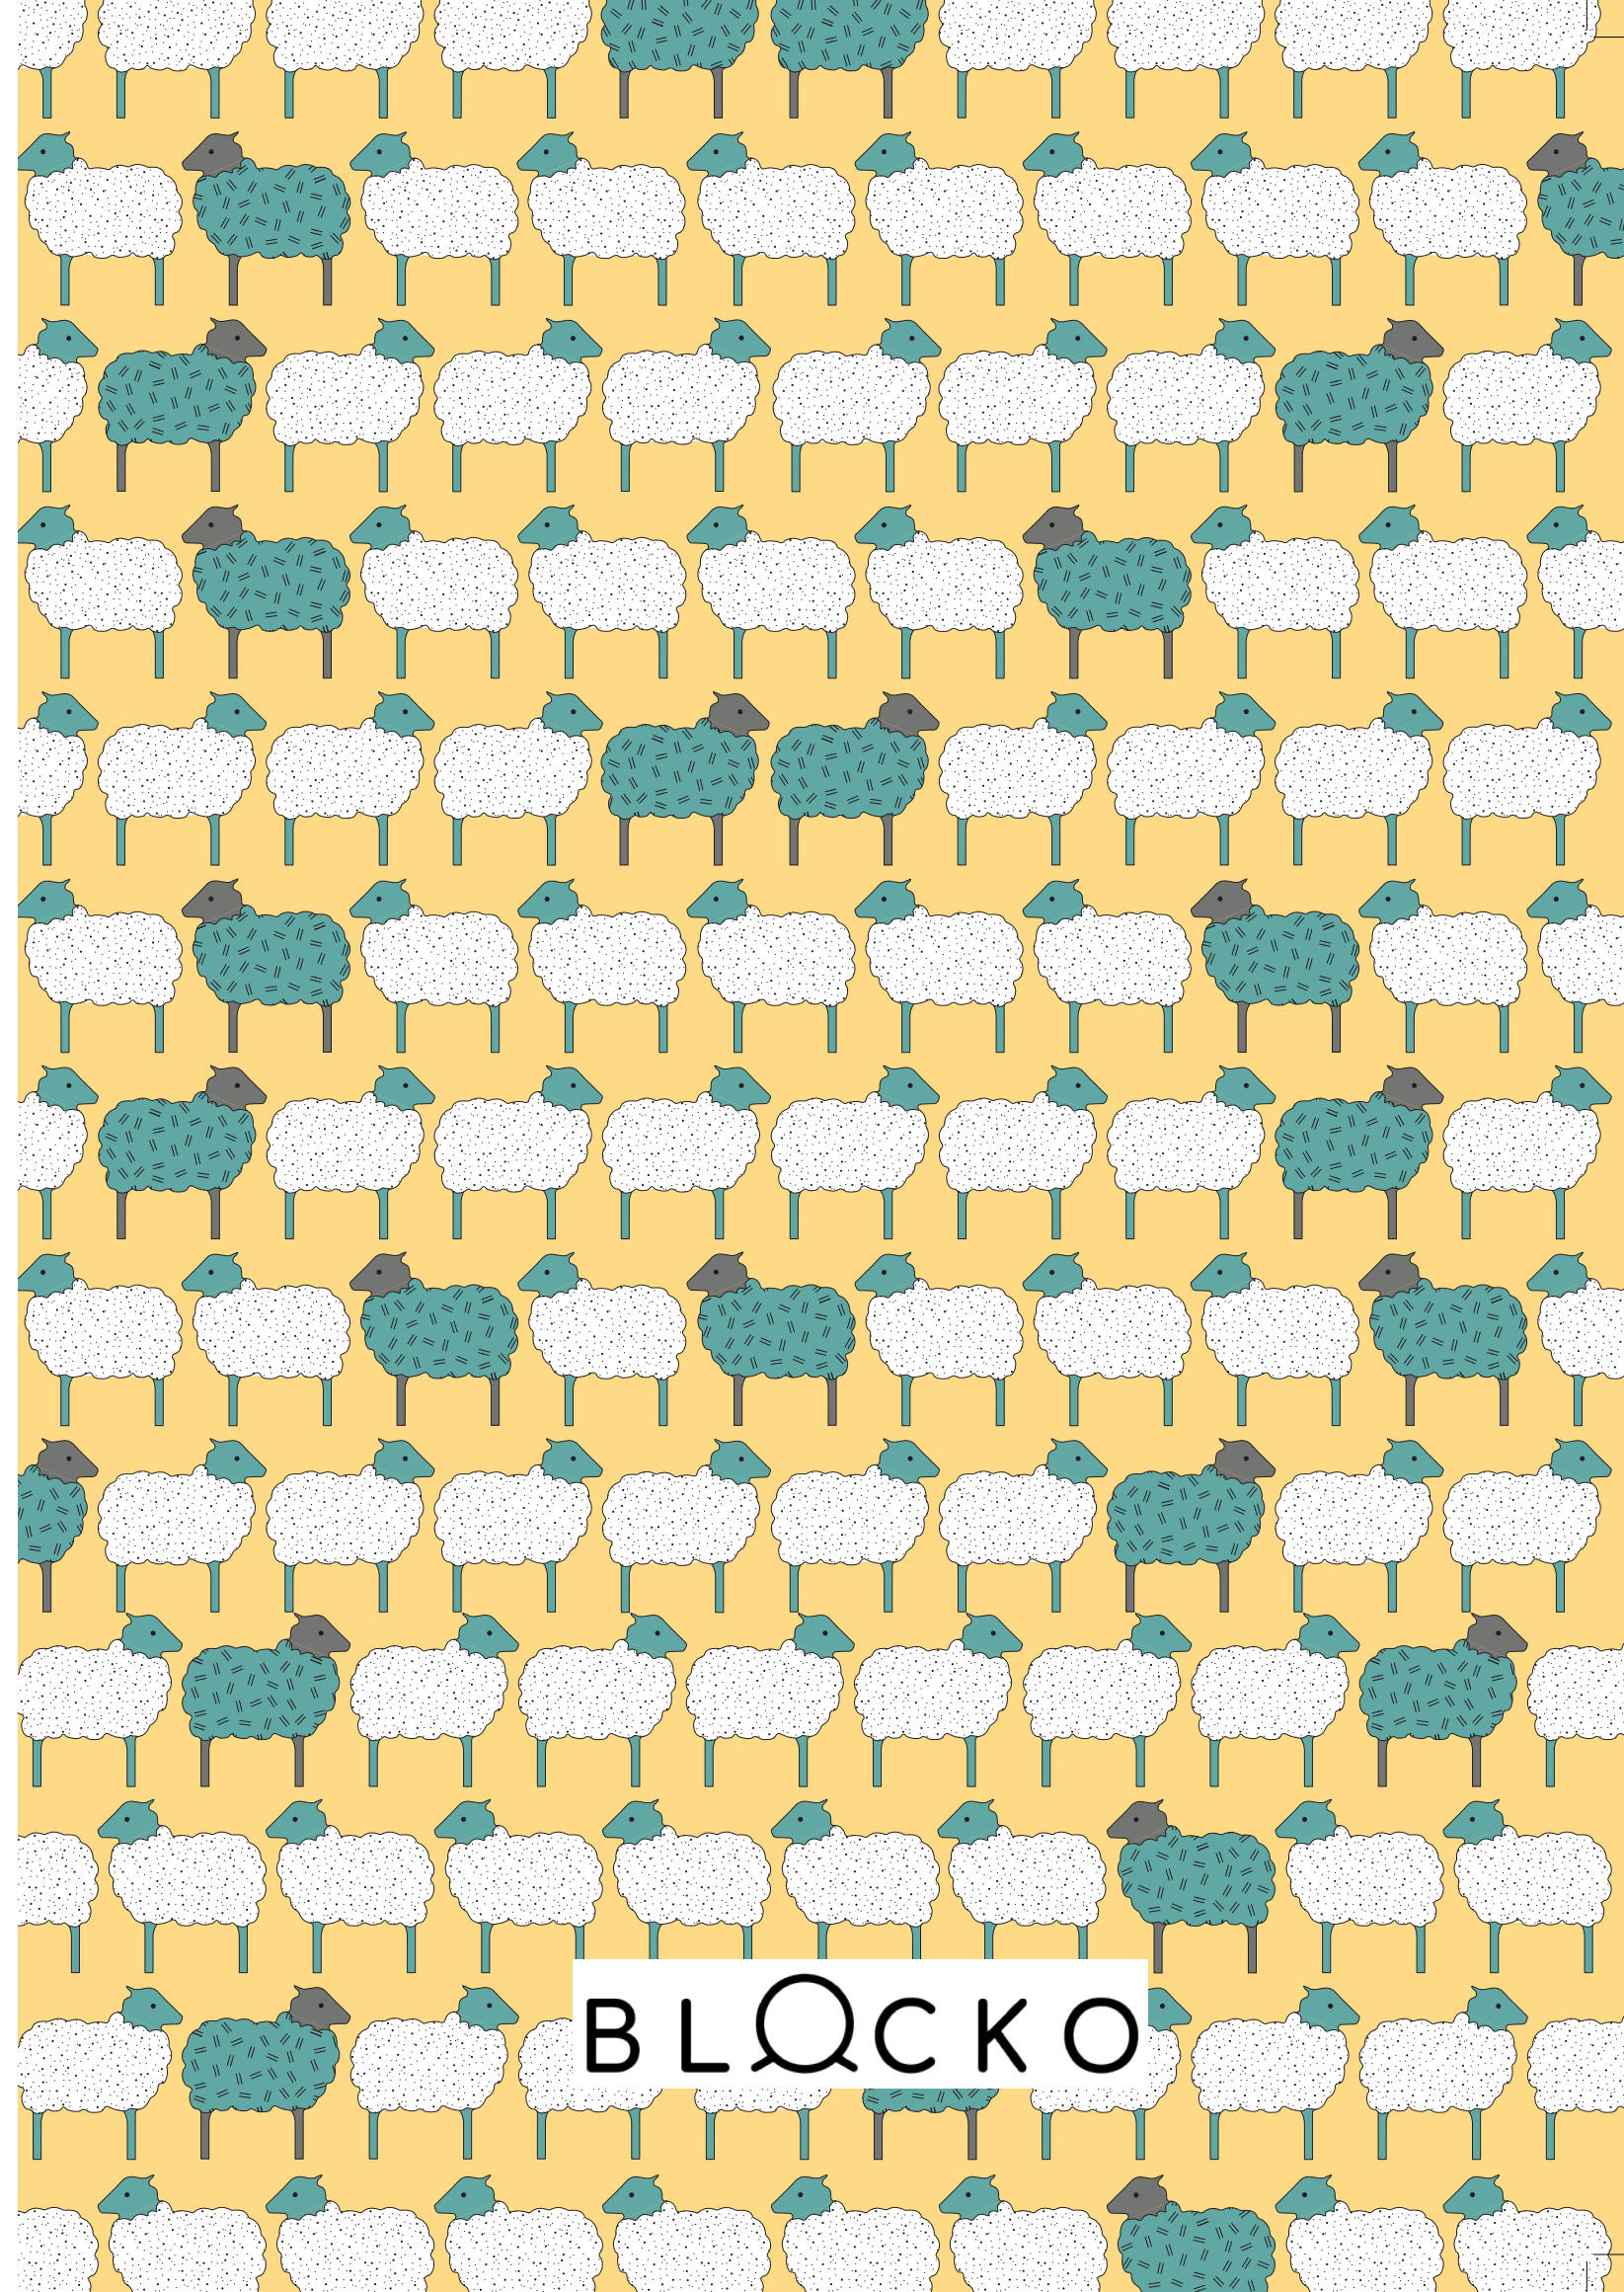

BLQCKO

